



## 10' X 8' 6" Standard

**SB841.6**  
 Double Doors One End  
 10' X 8'6" Bicon Dry Freight ISO Cargo Container


### PRODUCT FEATURES

#### STANDARD FEATURES

- Corrugated steel sides, and roof
- 14 gauge locking steel double end swing doors
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs per 44 square inches
- 24 Tie down steel lashing rings, 4000 lbs. cap. each
- (2) way fork lift pockets
- Vents, (2) each
- Front corner post tie downs, (5) on each side, (10) total
- Door corner post tie downs, (5) on each side, (10) total
- Restraint system shoring slot will support 2" x 6" lumber
- (4) Recessed D-rings on Floor on Cargo End
- (4) Lashing Rings on Front End
- Bottom side rail relief notches, (2) per side, (4) total
- Front & Rear End Bottom rail relief notches, (2) per end, (4) total
- (4) Recessed Floor Anchors

#### OPTIONAL FEATURES

- Connecting couplers, (2) per Bicon
- Connecting coupler storage bracket (1) each
- (4) Composite Shelves
- Manifest box (2) each
- Adjustable shelving brackets = (4) vertical E-track on each side wall
- (2) Document Holders
- (16) Decking and shoring beams

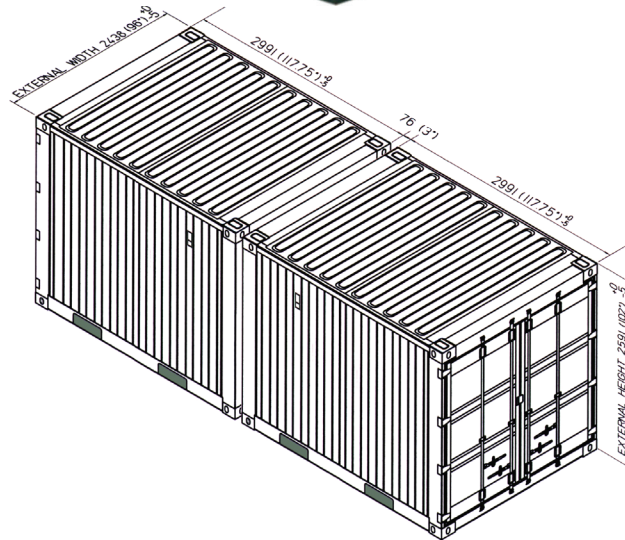

(2) Bicon Containers coupled together to form (1) 20' ISO module

NSN # 8150-01-481-3740 OLIVE DRAB #34094

NSN # 8150-01-481-3741 TAN #33446

012023-R00

### ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
<b>Ft in</b>	9' 9-3/4"	9' 3-7/16"	8' 6"	7' 10-3/8"	8' 0"	7' 8-9/16"	7' 6"	7' 8-1/4"
<b>Metric</b>	2,991	2,831	2,591	2,397	2,438	2,350	2,287	2,340

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
<b>Lbs</b>	3,000	23,460	26,460	563 Cu.Ft.
<b>Kgs</b>	1,360	10,640	12,000	15.9 Cu.M.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001



CERTIFIED QUALITY MANAGEMENT SYSTEM

CONTRACT # GS-02F-0024P  
**GSA Advantage!**