



# SEA BOX<sup>®</sup>

## Double Doors on Both Ends and Double Side Doors (TYPE 3) 20' X 8' Dry Freight ISO Cargo Container


**SB863-0-ST:THAAD**  
 Double Doors on Both Ends and Double Side Doors  
 (TYPE 3) 20' X 8' Dry Freight ISO Cargo Container



### PRODUCT FEATURES

#### STANDARD FEATURES

- Corrugated steel sides and roof
- 14 gauge locking steel double end swing doors on one end and one side
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs per 44 square inches
- Tie down steel lashing rings, 4000 lbs. cap. each
- "E" Track installed on fixed walls at 18" & 48" from floor
- Standard overhead lighting with switch & 50' power cord
- (2) way laden fork lift pockets
- 2nd set of (2) way unladen fork lift pockets
- Vents, (2) each

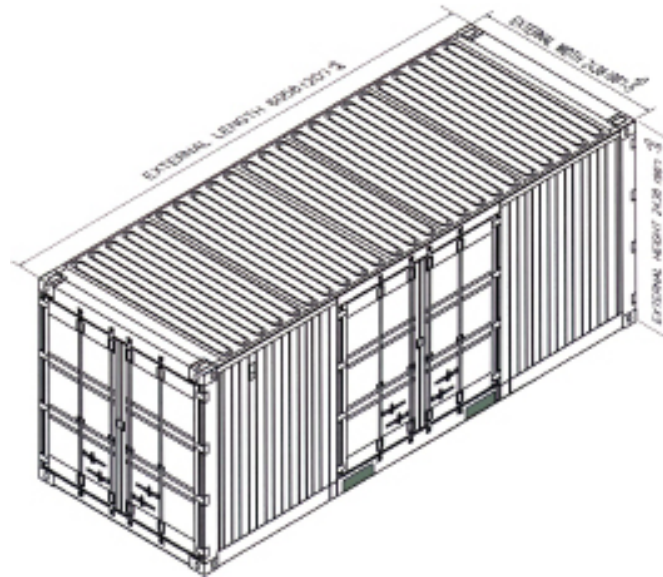

020416-R01

#### ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

	LENGTH		HEIGHT		WIDTH		DOOR OPENING		SIDE DOOR OPENING	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width	Height	Width
<b>Ft in</b>	19' 10 1/2"	19' 4 3/16"	8' 0"	7' 4 3/16"	8' 0"	7' 5 1/16"	6' 11 21/32"	7' 8 1/2"	7' 21/64"	7' 8 11/64"
<b>Metric</b>	6,058	5,898	2,438	2,240	2,438	2,264	2,125	2,350	2,142	2,341

	TARE WEIGHT	PAYLOAD	GROSS WEIGHT	CUBIC CAPACITY
<b>Lbs</b>	5,380	47,530	52,910	1,086 Cu. Ft.
<b>Kgs</b>	2,440	21,559	24,000	30.7 Cu. M.

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

ISO 9001



CERTIFIED QUALITY  
MANAGEMENT SYSTEM

CONTRACT # GS-02F-0024P  
**GSA Advantage!**<sup>™</sup>